

H20DL

Hydrostatique

2WD & 4WD

mast[®] EXPLORER

Tout Terrain

H20DL

Características Técnicas Technical Details

Technische Daten Caractéristiques Techniques



Capacidad Nominal Nominal Capacity	2000 kg 4000 lb	Capacité Tragkraft
Centro de Carga Load Center	500 mm 24" for data in lb	Centre de Charge Lastschwerpunkt
Motor Diésel Diesel Engine	Perkins 404C.15 4 cil. / 36 hp	Moteur Diésel Diesel Motor
Transmisión Hidrostática Hydrostatic Transmission	Automotive HP	Transmission Hydrostatique Getriebe Hydrostat
Mástiles Dúplex Two Stage Masts	2,7 m* 9,0 ft*	Mâts Duplex Duplex Mast
Mástiles Tríplex Three Stage Masts	3,7 m 12,0 ft	Mâts Triplex Triplex Mast
Portahorquillas Forks Carriage	FEM II B	Tablier Gabelträger
Desplazador Integrado Integrated Sideshift	Standard	TDL Intégré Eingebaut Seitenschieber
Pendiente Superable Gradeability	35%	Pente supérable Ersteigbarer Hang
Peso Total Total Weight	4x2 3200 kg 7055 lb 4x4 3300 kg 7275 lb	Poids Total Gewicht

*Mástil Estandar, Standard Mast, Mât Standard.

Especificaciones técnicas Technical Specifications

Maschinenmesstechnik Specifications Techniques

A	Longitud total Total length	2620 mm 98 in	Longueur Länge
B	Distancia entre ejes Axles distance	1480 mm 58 in	Distance entre essieux Entfernung zwischen Achsen
C	Distancia de carga Load distance	420 mm 17 in	Distance de charge Last Abstand
D	Voladizo trasero Rear projection	720 mm 28 in	Porte a faux arriere Rückprojektion
E	Altura libre al suelo Ground clearance	270 mm 11 in	Hauteur libre au sol Bodenfreiheit
F	Altura total Total height	2000 mm 79 in	Hauteur Höhe
G	Anchura total Total width	1380 mm 54 in	Largeur Breite
H	Radio de giro Turning radius	4x2 2800 mm 110 in 4x4 3600 mm 142 in	Rayon de braquage Wendelgang Breite

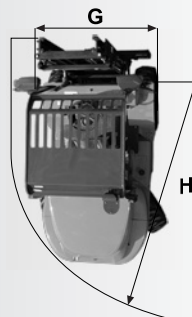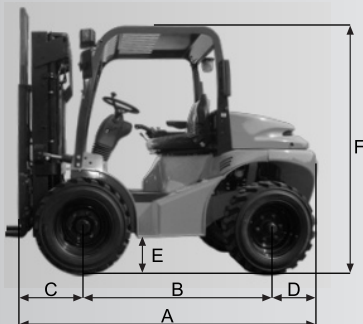

Cabina y calefacción
Cabin & heating



Kabine und Heizung
Cabine et chauffage

EXPLORER