

# H35DA

## Hydrostatic

### 2WD & 4WD

# mast EXPLORER

## Rough Terrain

# H35DA

### Características Técnicas Technical Details

### Technische Daten Caractéristiques Techniques



Capacidad Nominal Nominal Capacity	<b>3500 kg 7716 lb</b>	Capacité Tragkraft
Centro de Carga Load Center	<b>500 mm 24" for data in lb</b>	Centre de Charge Lastschwerpunkt
Motor Diésel Diesel Engine	<b>804C.33 4 cil. / 63 hp</b>	Moteur Diésel Diesel Motor
Transmisión Hidroestática Hydrostatic Transmission	<b>Rexroth</b>	Transmission Hydrostatique Getriebe Hydrostat
Mástiles Dúplex Two Stage Masts	<b>3,3* / 4,0 m 11* / 13 ft</b>	Mâts Duplex Duplex Mast
Mástiles Tríplex Three Stage Masts	<b>4,0 / 4,7 / 5,5 / 6,0 m 13 / 15 / 18 / 20 ft</b>	Mâts Tríplex Triplex Mast
Portahorquillas Forks Carriage	<b>FEM III B</b>	Tablier Gabelträger
Desplazador Integrado Integrated Sideshift	<b>Standard</b>	TDL Intégré Eingebaut Seitenschieber
Pendiente Superable Gradeability	<b>35%</b>	Pente Superable Ersteigbarer Hang
Peso Total Total Weight	<b>5780 kg 12.743 lb</b>	Poids Total Gewicht

\*Mástil Estandar, Standard Mast, Mât Standard.

### Especificaciones técnicas Technical Specifications

### Maschinenmesstechnik Specifications Techniques

A	Longitud total Total length	<b>3275 mm 129 in</b>	Longueur totale Länge
B	Distancia entre ejes Axles distance	<b>2045 mm 80 in</b>	Distance entre essieux Entfernung zwischen Achsen
C	Distancia de carga Load distance	<b>630 mm 25 in</b>	Distance de charge Last Abstand
D	Voladizo trasero Rear projection	<b>530 mm 23 in</b>	Porte a faux arriere Rückprojektion
E	Altura libre al suelo Ground clearance	<b>330 mm 13 in</b>	Hauteur libre au sol Bodenfreiheit
F	Altura total Total height	<b>2175 mm 86 in</b>	Hauteur totale Höhe
G	Anchura total Total width	<b>1700 mm 67 in</b>	Largeur totale Breite
H	Radio de giro Turning radius	<b>4x2 3000 mm 118 in 4x4 4500 mm 177 in</b>	Rayon de braquage Wendelngang Breite

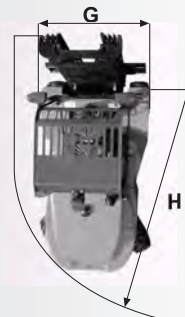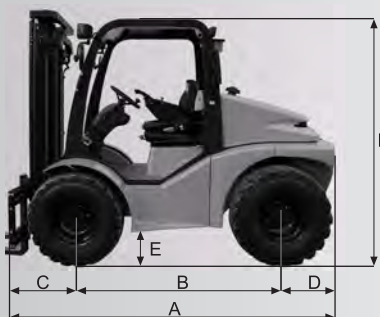

Fiable en conditions adversas  
Reliable through a hard use



Ihr zuverlässigste Partner  
Fiabilité totale dans les conditions les plus défavorables



Columna regulable  
Adjustable steering wheel



Cierres de seguridad  
Segu Colone adjustable  
Regulierbarers Lenkrad