

H40DA

Hydrostatic

mast
EXPLORER

Rough Terrain

H40DA

2WD & 4WD


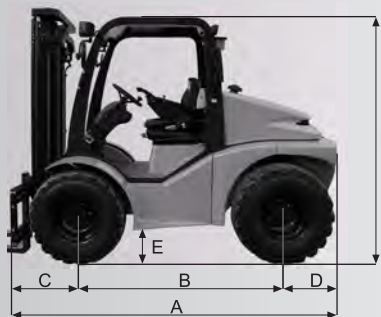
Características Técnicas
Technical Details**Technische Daten**
Caractéristiques Techniques

Capacidad Nominal Nominal Capacity	4000 kg 8818 lb	Capacité Tragkraft
Centro de Carga Load Center	500 mm 24" for data in lb	Centre de Charge Lastschwerpunkt
Motor Diésel Diesel Engine	804C.33T 4 cil. / 63 hp	Moteur Diésel Diesel Motor
Transmisión Hidroestática Hydrostatic Transmission	Rexroth	Transmision Hydrostatique Getriebe Hydrostat
Mástiles Dúplex Two Stage Masts	3,3* / 4,0 m 11* / 13 ft	Mâts Duplex Duplex Mast
Mástiles Tríplex Three Stage Masts	4,0 / 4,7 / 5,5 / 6,0 m 13 / 15 / 18 / 20 ft	Mâts Tríplex Triplex Mast
Portahorquillas Forks Carriage	FEM III B	Tablier Gabelträger
Desplazador Integrado Integrated Sideshift	Standard	TDL Intégré Eingebaut Seitenschieber
Pendiente Superable Gradeability	35%	Pente Superable Ersteigbarer Hang
Peso Total Total Weight	6029 kg 13.292 lb	Poids Total Gewicht

*Mástil Estandar, Standard Mast, Mât Standard.

Especificaciones técnicas
Technical Specifications**Maschinenmesstechnik**
Specifications Techniques

A	Longitud total Total length	3375 mm 133 in	Longueur totale Länge
B	Distancia entre ejes Axles distance	2045 mm 80 in	Distance entre essieux Entfernung zwischen Achsen
C	Distancia de carga Load distance	630 mm 25 in	Distance de charge Last Abstand
D	Voladizo trasero Rear projection	530 mm 23 in	Porte a faux arriere Rückprojektion
E	Altura libre al suelo Ground clearance	330 mm 13 in	Hauteur libre au sol Bodenfreiheit
F	Altura total Total height	2175 mm 86 in	Hauteur totale Höhe
G	Anchura total Total width	1700 mm 67 in	Largeur totale Breite
H	Radio de giro Turning radius	4x2 3000 mm 118 in 4x4 4500 mm 177 in	Rayon de braquage Wendelngang Breite

Asiento Grammer multiposición
Multi-adjustable Grammer® seatSiège Grammer multi positions
Multi-Regulierbarer Grammer® SitzAire Acondicionado*
Air Conditioner
Climatisation
Klimaanlage**mast**
EXPLORER

*no standard