

# H70DA

## Hydrostatique

### 2WD

# mas EXPLORER

## Tout Terrain

# H70DA

### Características Técnicas Technical Details

### Technische Daten Caractéristiques Techniques


Capacidad Nominal Nominal Capacity	<b>7000 kg</b> <b>15.432 lb</b>	Capacité Tragkraft
Centro de Carga Load Center	<b>500 mm</b> <b>24" for data in lb</b>	Centre de Charge Lastschwerpunkt
Motor Diésel Diesel Engine	<b>1104C.44T</b> <b>4cil. / 100 hp</b>	Moteur Diésel Diesel Motor
Transmisión Hidroestática Hydrostatic Transmission	<b>Linde</b> <b>Automotive</b>	Transmision Hydrostatique Getriebe Hydrostat
Mástiles Dúplex Two Stage Masts	<b>4,0 m*</b> <b>13 ft*</b>	Mâts Duplex Duplex Mast
Mástiles Triplex Three Stage Masts	<b>4,0 / 4,7 / 5,5 / 6,0 m</b> <b>13 / 15 / 18 / 20 ft</b>	Mâts Triplex Triplex Mast
Portahorquillas Forks Carriage	<b>FEM III B</b>	Tablier Gabelträger
Desplazador Integrado Integrated Sideshift	<b>Standard</b>	TDL Intégrè Eingebaut Seitenschieber
Pendiente Superable Gradeability	<b>30%</b>	Pente Superable Ersteigbarer Hang
Peso Total Total Weight	<b>7915 kg</b> <b>17.450 lb</b>	Poids Total Gewicht

\*Mástil Estandar, Standard Mast, Mât Standard.

### Especificaciones técnicas Technical Specifications


### Maschinenmesstechnik Specifications Techniques

A	Longitud total Total length	<b>3875 mm</b> <b>153 in</b>	Longueur totale Länge
B	Distancia entre ejes Axles distance	<b>2440 mm</b> <b>96 in</b>	Distance entre essieux Entfernung zwischen Achsen
C	Distancia de carga Load distance	<b>725 mm</b> <b>29 in</b>	Distance de charge Last Abstand
D	Voladizo trasero Rear projection	<b>707 mm</b> <b>28 in</b>	Porte a faux arriere Rückprojektion
E	Altura libre al suelo Ground clearance	<b>365 mm</b> <b>14 in</b>	Hauteur libre au sol Bodenfreiheit
F	Altura total Total height	<b>2445 mm</b> <b>96 in</b>	Hauteur totale Höhe
G	Anchura total Total width	<b>1960 mm</b> <b>77 in</b>	Largeur totale Breite
H	Radio de giro Turning radius	<b>3750 mm</b> <b>147 in</b>	Rayon de braquage Wendelngang Breite

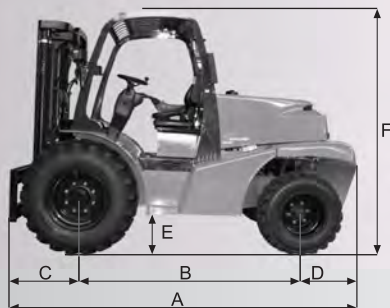

Inversor de marcha de una sola velocidad  
Two speed, forward and reverse,  
hydrostatic drive

Changement de vitesse automatique  
Ergonomische Joystick

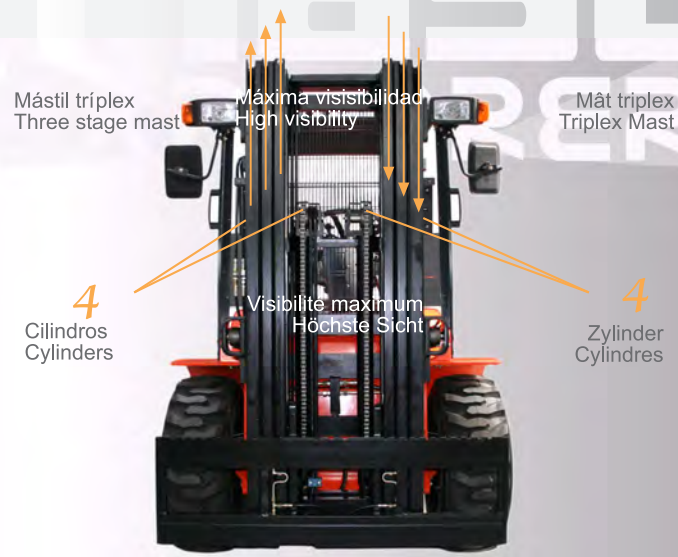

Mástil triplex  
Three stage mast

Máxima visibilidad  
High visibility

Mât triplex  
Triplex Mast

4  
Cilindros  
Cylinders

Visibilité maximum  
Höchste Sicht

4  
Zylinder  
Cylindres